

FRONT VIEW

180° air outlet from under a flat black baffle


Keyhole slots in fixture back for mounting

Wiring tray coated with titanium dioxide (TiO₂) for VOC removal

Two PL-L36WTUV lamps=24UVW

Ballast (inside): 120V/1.3A; 50-60Hz

END VIEW



Air inlet on both ends

Disconnect power to installation area. All electrical work to be performed by a licensed, experienced electrician as per the National Electrical Code (NEC) and local code.


CAUTION: Risk of exposure to excessive ultraviolet (UV) radiation - Do not operate without complete lamp enclosure in place or if glass lens is damaged.

This fixture is designed for use with germicidal lamps and must be installed in compliance with competent technical directions so that user's eyes and bare skin will not be subjected to injurious rays.

WARNING: Eye damage may result from directly viewing the light produced by these lamps. To reduce the risk of exposure to UV-radiation, take UV-radiation protective measures for personnel during servicing.

WARNING: Do not mount in direct line-of-sight of adjacent wiring or nonmetallic materials.

WARNING: Do not mount in direct line-of-sight of openings in the air handler/duct or of any access panels of a product connected to the air handler/duct.

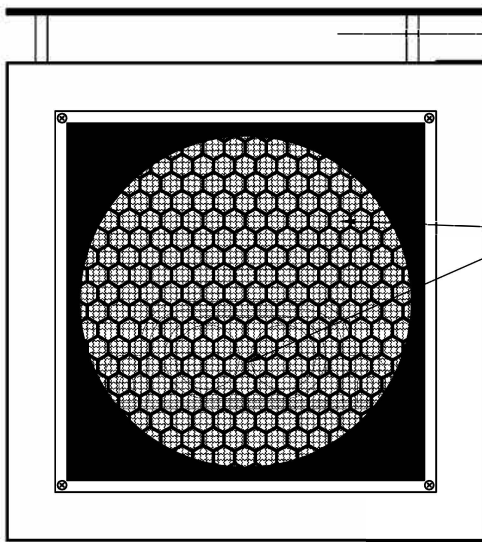

ENLARGED END VIEW

180° air outlet from under a flat black baffle

Fans & air inlets on both ends with protective grills & filters (removable for maintenance). Remove & clean filters monthly.

180° air outlet from under a flat black baffle

Plug & cord from bottom to standard 120V 3-prong grounded outlet

Stainless steel front cover is removable for maintenance. Remove cap nuts on face of unit & remove stainless steel cover. This allows maintenance & installation of fixture.

Air inlet on both ends

Electrical Requirement: 120V/2.6A

**DATA DRAWING
& OPERATION
INSTRUCTIONS FAWM-236**



1931 Thomas Rd.
901-800-1709



Bartlett, TN 38134
email@evergreenUV.com