LUMALIER




ODM Series

IN AHU AND IN DUCT UVC FIXTURES

Our ODM Series UVC Fixtures are engineered for indoor split system air handlers (AHUs) and outdoor rooftop package units.

Models

The ODM is available in three lamp sizes (35W, 60W, 95W) to provide options for various duct sizes. All lamps are non-proprietary Philips lamps that are chill corrected down to 40 degrees Fahrenheit.

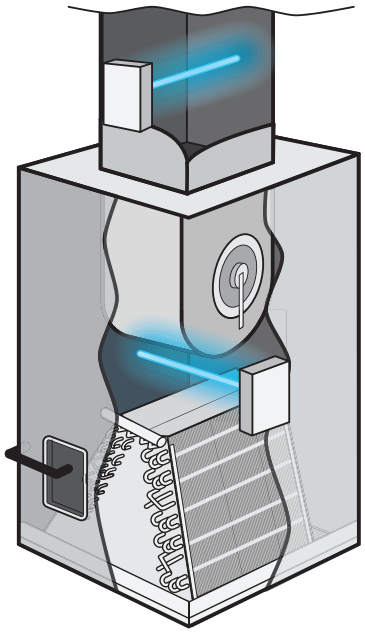

Works invisibly within existing HVAC systems to provide UVC coverage and application.

Installed at the coil plenum for optimal UVC application.

Works 24/7.

Non-proprietary components for low-cost of ownership.

1931 Thomas Road | Memphis TN 38134 | 901-800-1709

ODM Series


IN AHU AND IN DUCT UVC FIXTURES


ODM UV Air Fixture Product Specifications

Standard Specifications	
Lamp Specs	PL-L 35W, 60W, 95W TUV (non-proprietary)
Wavelength	254 Nanometers*
Expected Lamp/ Bulb Rated Life[1]	18 months
Lamp Socket	Single Ended, 4 Pin, 2G11
Input Voltage	Self Regulated Electronic UV Ballast 120V to 250V
Electrical Requirement	See Ordering Guide
Housing Finish	Aluminum
Weight	ODM 1 Light - 8 lbs.
Certifications:	ASHRAE: meets ASHRAE TC 2.09 EPA: EST. NO. 91347-TN-002
Warranty	Lamps/2 years; Parts/5 years

*Lumalier ODM Fixtures don't produce ozone.

[1]With 80% utilization

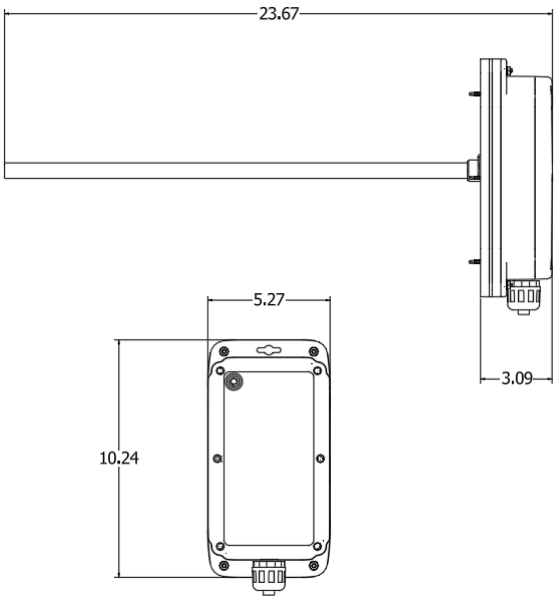

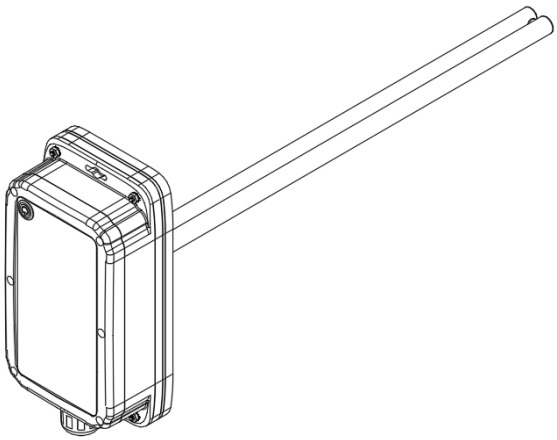

In AHU Fixture Series Ordering Guide

Model#	Description
ODM-135	One 35W Lamp 0.3A @ 120V, 0.15A @ 240V
ODM-160	One 60W Lamp 0.50A @ 120V, 0.25A @ 240V
ODM-195	One 95W Lamp 0.80A @ 120V, 0.40A @ 240V

Due to continuing research, Lumalier reserves the right to change specifications without notice.

LUMALIER

1931 Thomas Road | Memphis TN 38134 | 901-800-1709

©2026 Evergreen UV, LLC. All Rights Reserved.